




# RM-DSA800 Rackmount Kit



## Product Overview

RM-DSA800, the rackmount kit of DSA800 series spectrum analyzer, as shown below, is used to mount your analyzer into a standard 19-inch machine cabinet.

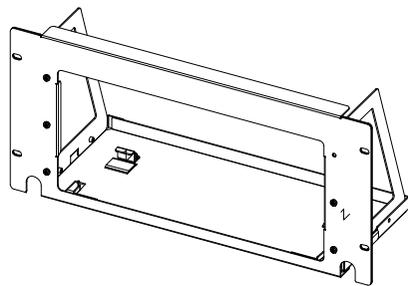

## Kit Parts List

No.	Name	Qty.	Description
1	Front Panel	1	
2	Left Plate	1	
3	M4 Screw	14	M4 x 8 Cross Recessed Pan Head Screw
4	Spring Washer	4	
5	Washer	4	
6	Support Board	1	
7	Retaining Bracket	2	
8	Right Plate	1	
9	M6 Screw	4	M6 x 16 Phil-Slot Pan Head Screw
10	M6 Nut	4	M6 x 5 Lock Blade Square Nut

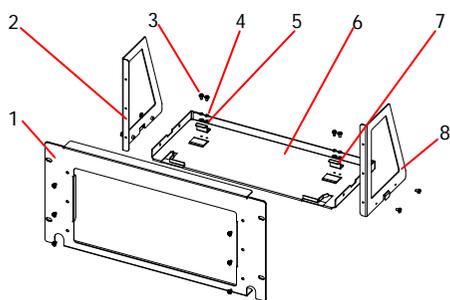


## Space Requirements for Installation

The follow requirements must be fulfilled by the machine cabinet in which the instrument is mounted.

- Dimension of the machine cabinet must be standard 19-inch.
- At least 5U (222.2 mm) space should be provided by the machine cabinet.
- The depth inside the machine cabinet should not be less than 200 mm.

The dimension of the instrument after being installed is shown below (the unit is mm).

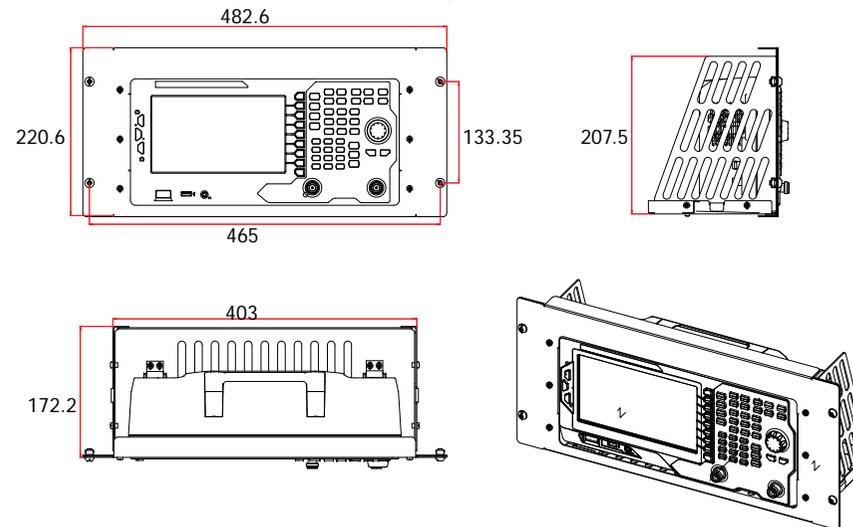

## Installation Tool

PH2 Phillips Screwdriver (recommended)


## Installation Procedures




### CAUTION

Only authorized operators can execute the installation operation because that the instrument will be damaged or installed in machine cabinet incorrectly if the installation is not proper.


1. Install the right and left plates: aim the detents of the right and left plates at the openings on the support board and insert respectively, then fix them using four M4 screws.

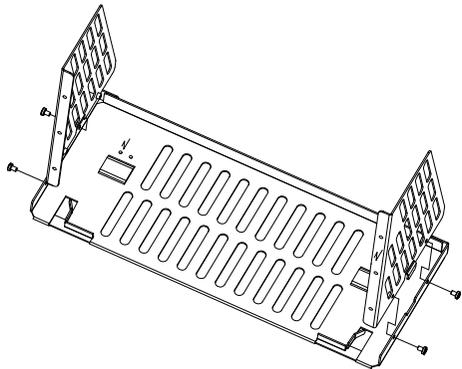


2. Install the front panel: let the screw holes fit well together and fix them with six M4 screws.

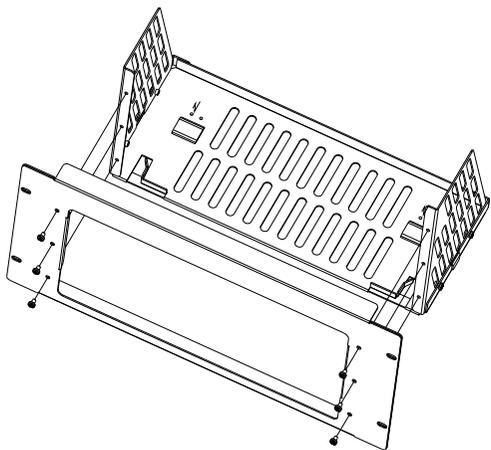

3. Place and fix the instrument: place the instrument into the confined position on the support board. Aiming the instrument front panel at the opening of the front panel of the rackmount kit and fix the instrument with four spring washers, four washers, two retaining brackets and four M4 screws.

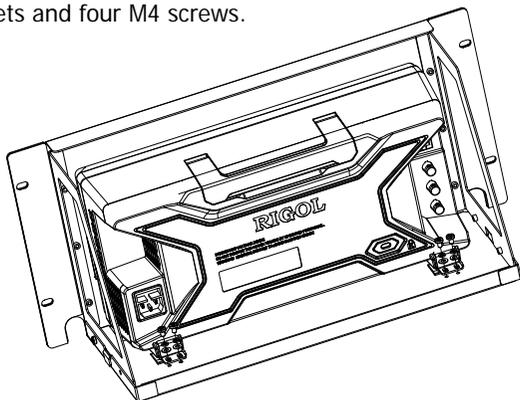

4. Load into the machine cabinet: mount the rack with instrument fixed into a standard 19-inch machine cabinet using four M6 screws and square nuts.

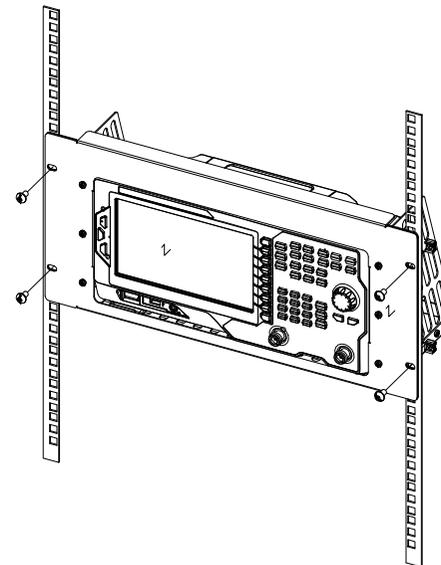

### Installation Cautions

The rack holds a height of 5U (1U=44.45 mm), and the holes pointed out by the arrows are the mounting holes for the rack which should be aligned when installing.

